


Environmental Flare



landfill systems

engineering a better environment

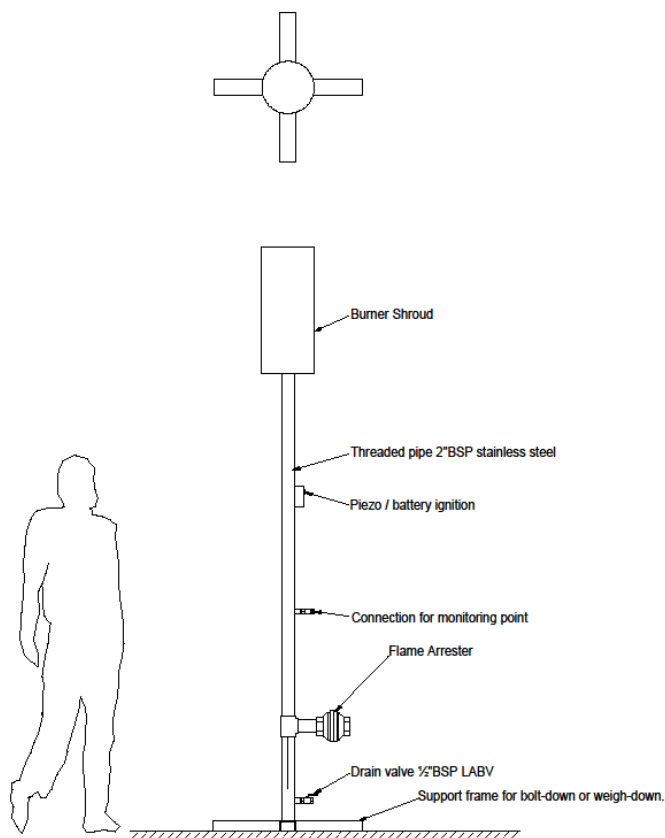

Landfill Systems manufacture both manual and automatic ignition versions of their successful range of Environmental Gas Flares.

The automatic unit is additionally supplied with a solar powered high energy spark system that trickle charges the battery to provide a frequent high energy spark.

The unit is ideally suited for individual wells, chambers or vents where traditional flaring techniques are not an option.

The gas quality can be monitored and the flow adjusted manually to optimise the burning conditions via a single gas monitoring point.

Specification

- Nominal flow: 4 – 6 Nm³/hr.
- Minimum gas pressure: 1.5mbar
- Typical methane range: 23 – 60%

- Low cost
- Low maintenance
- No mains power required
- Simple installation
- Simple operation
- Robust construction
- Flame arrester fitted as standard

For further information contact:



Landfill Systems
Crowcroft Road Industrial
Estate
Nedging with Naughton
Ipswich
IP7 7HR

Tel: +44 (0)1449 744475

michael@landfillsystems.co.uk